


SECTION B-B

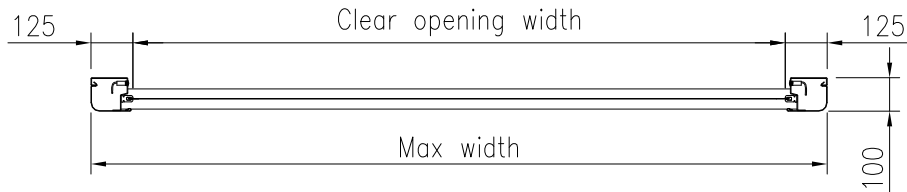

CLEAR OPENING WIDTH UP TO 4500 mm
CLEAR OPENING HEIGHT UP TO 3600 mm

DOOR MODEL: DYNAMICROLL® STD

OPENING SIZE (W X H)	POWER SUPPLY	SPACE FOR INSTALLATION		
W :	<input type="checkbox"/> Inverter 230 V monophase (up to 12 m²)	Right	Left	Top
H :	<input type="checkbox"/> Inverter 400 V threephase			

FRAME: -

CURTAIN: -

OPTIONS AND NOTES:

DATE:
30/04/2015

SHEET

1

FILE NAME:
DYN_SLM250_ENG.dwg

LAYER

A4



BMPEUROPE
HIGH SPEED DOORS

Tel. +39 0173.658312 info@bmpeurope.eu